

Power supply

- 200 - 240V 50/60Hz

Input power

- GOLDEN FOG 1000: 1,000 VA
- GOLDEN FOG 2000: 2,000 VA
- GOLDEN FOG 2000 DMX: 2,000 VA

Tank capacity

- GOLDEN FOG 1000: 1 litre
- GOLDEN FOG 2000 and 2000DMX: 2 litres

Consumption and maximum delivery

- GOLDEN FOG 1000: 27 g/min
- GOLDEN FOG 2000: 55 g/min
- GOLDEN FOG 2000 DMX: 46 g/min

Pre-heating time

- GOLDEN FOG 1000: 5 min. + 5 min. 30 sec.
- GOLDEN FOG 2000: 4 min. + 4 min. 30 sec.
- GOLDEN FOG 2000 DMX: 4 min. + 4 min. 30 sec.

Smoke delivery time

- GOLDEN FOG 1000: continuous
- GOLDEN FOG 2000: 60"/65"
- GOLDEN FOG 2000 DMX: 30 sec. at 100%, continuous with adjustment

CONTROL SYSTEMS

- GOLDEN FOG 1000 - 2000
 - Manual control
 - Remote manual control
 - 0-10V analogue input
- GOLDEN FOG 2000 DMX
 - Serial digital input RS232/423(PMX) or DMX512
 - 0-10V analogue input

INDICATORS


- GOLDEN FOG 1000 - 2000
 - Machine ready indicator light on remote control
 - Power light
- GOLDEN FOG 2000 DMX
 - Power light
 - Fluid finished indicator light
 - Automatic operation
 - DMX signal reception
 - PMX signal reception
 - Error in receiving signals

SAFETY DEVICES

Power supply automatically cut off in the event of the boiler overheating.

Weight and dimensions

- GOLDEN FOG 1000: Weight 7.5 Kg (16 lbs 8 ozs)
- GOLDEN FOG 2000: Weight 11 Kg (24 lbs 3 ozs)
- GOLDEN FOG 2000 DMX: Weight 12 Kg (26 lbs 6 ozs)

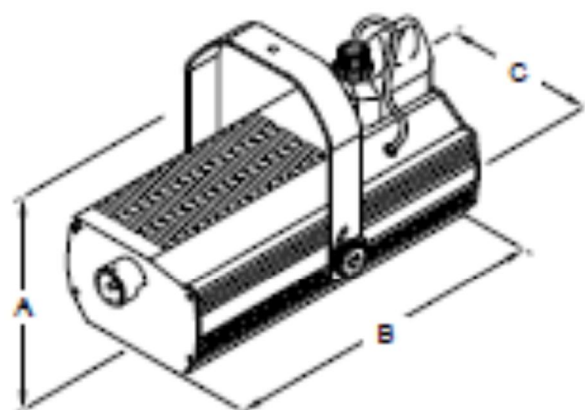

	A mm	B mm	C mm
GOLDEN FOG 1000	270 (10.63")	490 (19.29")	230 (9.06")
GOLDEN FOG 2000 and 2000 DMX	310 (12.20")	490 (19.29")	340 (13.39")